



PA High Speed Hydraulic Cone Crusher

CMC PA 液壓式錐碎機

CMC PA SERIES HIGH SPEED CONE CRUSHER LEAD EDGE YOUR BUSINESS COMPETITIVENESS

啓銘PA系列高速錐碎機：讓您的業務始終保持領先

The best choice of cone crusher

高速錐碎機的最佳選擇

- 產量高 High capacity
- 破碎比大 Large crushing ratio
- 運行和磨耗成本低 Low operation and wear cost
- 服務期限更長 Long service life
- 合格細粒級產率高 Less over size
- 啓銘PA系列高速錐碎機領先石料和礦山行業破碎技術
CMC PA series high speed cone crusher leads quarry and mining industry technology

CMC PA series cone crusher combines speed, stroke and cavity design perfectly and can provide higher capacity and better product quality. It has wide applications:

啓銘PA系列高速錐碎機將破碎速度、衝程和腔型設計完美結合，能夠提供更高產量和更好的產品品質，具有更廣泛的適用性：

- 從石灰岩到鐵燐岩 From limestone to taconite
- 從公路碎石到機製人工砂 From road aggregate to crushed sand
- 從移動式破碎系統到大型固定式破碎廠
From mobile crusher to large-scale stationary crushing plant.

實踐證明：PA系列高速錐碎機無論在粗碎、中碎還是細碎作業，都顯示出無與倫比的性能。能提供更高的生產量，更佳的产品粒形，更高特定規格的成品率；方便的油壓調整，以及最大的可靠性和靈活性。

Field proven: PA series high speed cone crusher shows uncompetitive performance no matter in coarse, medium and fine crushing. It provides higher capacity, better product quality and product percentage for specified size; convenient hydraulic adjustment and maximum reliability and flexibility.





New generation crusher

新一代產品

啓銘PA系列高速錐碎機，採用了最新的破碎技術。其重型設計是享譽全球的西蒙斯圓錐破碎技術70多年經驗的又一個新的結晶，結構堅固和應用靈活性的特點得到進一步發展。啓銘PA系列高速錐碎機的革新性特點，如：液壓調整排料口、過鐵釋放以及液壓清腔功能，提高了生產率。

新一代啓銘PA系列高速錐碎機，破碎比更大，操作更方便，所需維護工作更少，使圓錐破碎機技術達到了一個新的境界。

PA系列高速錐碎機提供最高的破碎性能和最低的運行成本，以更少的牙板磨耗，生產更多更優良的產品。

CMC PA series high speed cone crusher is new generation cone crusher based on the famous Symons cone crusher with 70 years crushing technology. The robust structure and versatile application is improved. CMC PA series high speed cone crusher has innovative advantages: hydraulic adjustment of discharge set, trap iron release system, hydraulic release so as to increase production efficiency.

CMC new generation high speed cone crusher has high crushing ratio, easy operation and less maintenance which achieve a new era for cone crusher technology. PA series high speed cone crusher provides higher crushing performance and minimum operation cost, i.e. with less manganese wear to produce more cubical products.

Design to meet customer demand

為用戶的需求而設計

在今天競爭激烈的破碎篩分市場中，不堅持創新發展，設備就會落後、遭到淘汰。啓銘機械全心傾聽客戶的要求，擅長發現客戶的需求，對設備進行不斷完善與革新性改進。透過不斷的與用戶深入溝通，瞭解粗碎、中碎和細碎圓錐破碎機需要具備的特性：

In the highly competitive crushing and screening equipment market nowadays, without insistent Innovation and Developments, it is naturally to be eliminated by market because of old fashion products. CMC listens to customer voice and is good at finding client demand and makes continuous improvement on products. By continuous communications with clients deeply and realizes the required characteristics of coarse, medium and fine crushing cone crusher:

- 設計簡捷、外形體積小 Compact design and small size
- 能以更小的排料口生產 Can set up in smaller discharge set during production
- 運行成本最小化 Minimum operation cost
- 可轉換、適應各種不同的用途 Can fit for different applications in one crusher

啓銘的研發團隊將上述難以統一的性能融合在新一代啓銘PA系列高速錐碎機上，應用領域更廣，滿足最困難的作業條件，實現更高的生產力，確保最低的運行成本。

CMC R & D team incorporates the above advantages which are difficult to integrate together into new generation PA series high speed cone crusher. It is wider application, satisfaction of most difficult operation conditions, higher capacity and lower operation cost.

FEATURES AND ADVANTAGES

設備特點與優勢

Best Performance

性能最高

啓銘PA系列高速錐碎機使您能夠以較少的破碎段數生產更細的產品，降低您的投資並節省電能消耗。怎樣才能把客戶的希望需求付諸現實呢？通過優化破碎速度和加大衝程相結合，PA系列高速錐碎機能夠提供當今圓錐破碎機中最大的破碎比。因為其破碎作用的超級效率，相同動錐直徑的PA系列高速錐碎機可發揮的功率最高。因此能夠降低破碎循環負荷，每噸最終產品的電耗可以降低一半。破碎腔內更高的物料密度增強了粉碎作用，從而最終產品粒度組成更穩定、粒型(立方性)更優。新一代啓銘PA系列高速錐碎機保有了經過實踐檢驗的定錐旋轉調整設計，破碎腔整個周邊的磨損更加均勻、排礦口更恆定。

CMC PA series high speed cone crusher provides clients finer products with less crushing stages so as to reduce investment and save power consumption. How can it be workable?

PA series high speed cone crusher provides the maximum crushing ratio in the world by combination of high speed and large stroke. PA series cone crusher takes more power in same mantle diameter cone crusher and thus does more work due to super crushing efficiency. So the circulate load can be reduced and the power consumption per tonnage can be reduced half. The denser material in crusher cavity enhances the interparticle crushing action. This causes more fine material output and cubic material shape.

New generation CMC PA series high speed cone crusher has field proven concave rotation adjustment design which makes wear of whole circumference more even and so as discharge opening.

Shorten down time

停機時間更短

新型PA系列高速錐碎機的停機時間減少，增加了操作人員的信心。可能導致其它許多破碎機停機或者損壞的過鐵狀況，在全新設計的PA系列高速錐碎機雙作用液壓過鐵釋放缸能夠應付自如，如果破碎機在負載狀態下停機，雙液壓過鐵釋放缸提供較大的清理行程，可迅速清理破碎腔。先進的活動牙板和固定牙板固定系統，牙板更換迅速，使用壽命更長。

The down time of new series PA high speed cone crusher is less which increases the confidence of operators. For the most trap iron problems which causes shut down or damage of cone crusher are easily handled by dual-acting hydraulic release system. Dual-acting hydraulic release system provides larger material clearing travel in case of crusher stops on load condition which can rapidly release material remained in cavity. Advanced mantle and concave fixing system provides faster change of liners. The life time of liners is longer.

Easy maintenance

維修方便

青銅滑動軸承在灰塵多和高衝擊震動破碎環境中，自始至終保持優良的承載性能，並且比滾動軸承更經濟，更容易在現場使用常規工具進行更換，固定和活動牙板總成都很容易拆出。


The bronze bushes keep good loading performance in dusty and high impact/ vibration environment. They are more economical than roller bearings and easily replaced at site, besides mantle and concave assemblies are easily dismantled.



更大破碎力 Larger crushing force



更換牙板 Replacement of liners

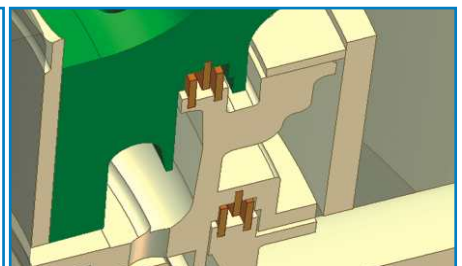

破碎機解體 Construction of crusher

Low maintenance costs


維修費用低

高性能非接觸式迷宮密封環，提高了阻擋粉塵的可靠性。設計簡捷，使得接觸岩石和粉塵的活動組件更少。破碎機的所有部件均有耐磨保護—包括可更換的上止推板、偏心體銅片、固定銷銅套、傳動軸護蓋、配重耐磨環、筒身內襯板和進料室—將維修費用降到最低限度。

High performance non-contacting labyrinth seals provide high reliability by keeping out dust without wearing out. Their simple design means fewer moving parts come into contact with the rock and dust. Excellent wear protection of all crusher components—including replaceable upper step bearing, upper thrust liners, mainframe pin bushings, countershaft box guard, balance weight liner, mainframe liners, and the feed hopper—keep maintenance costs to a minimum.

Main Components


主要部件

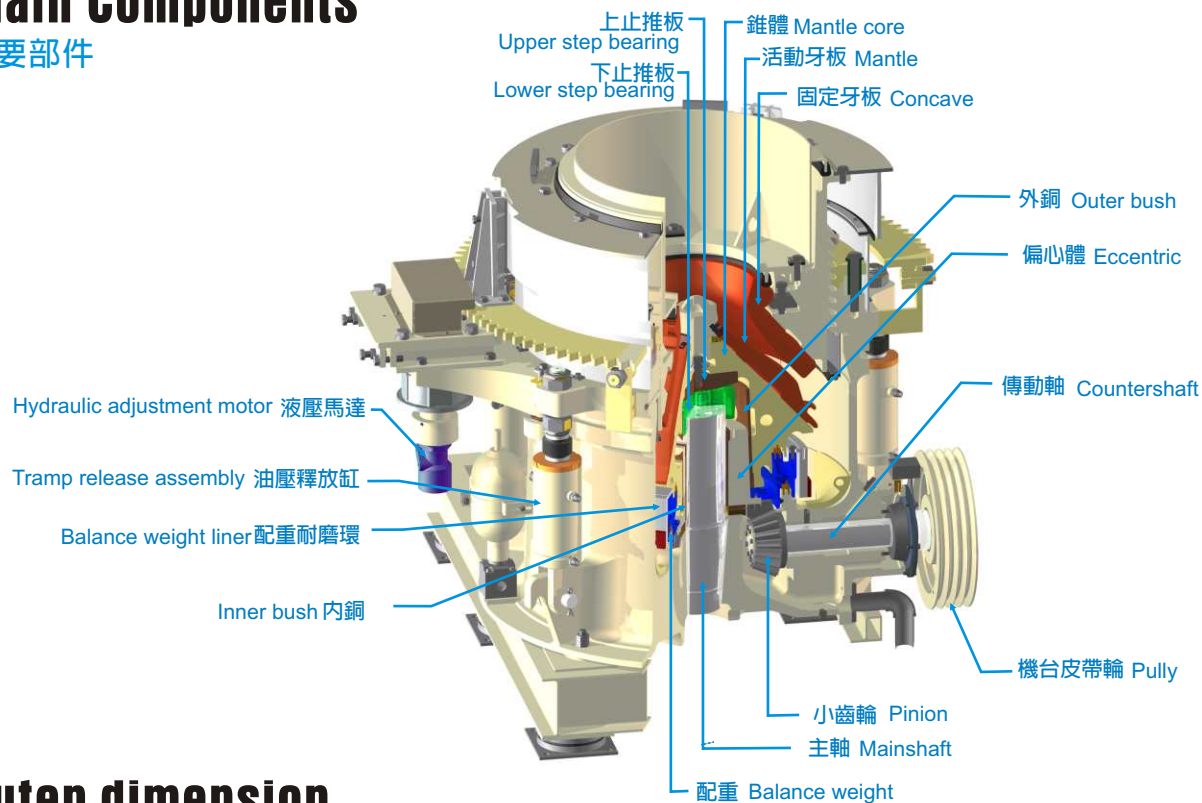

Outer dimension

外形尺寸

外形尺寸 (mm) Outer dimension	P1A	P2A	P3A	P4A
A. 至油管底部 Bottom of oil piping	120	170	230	278
B. 調整環最大直徑 Adjustment ring maximum diameters	1270	1420	1732	2145
C. 至傳動軸末端 To end of countershaft	844	1016	1239	1428
D. 至頂部最大高度 Maximum height to top	1460	1635	1994	2430
E. 給料斗內徑 Inside diameter of feed hopper	738	887	1082	1217
F. 移出動錐部份所需空間 Clearance required for removing bowl assembly	1900	2230	2720	2950
G. 在清理破碎腔時給料斗的向上位移 Additional up-ward travel of feed hopper during clearing stroke	110	110	150	160
H. 地腳螺栓孔的位置 Mounting hole location	440	545	665	830
I. 主機架排料口的直徑 Main frame discharge opening diameter	1000	1248	1522	1760
J. 機台最大寬度 Maximum frame diameter	1540	1802	2198	2550

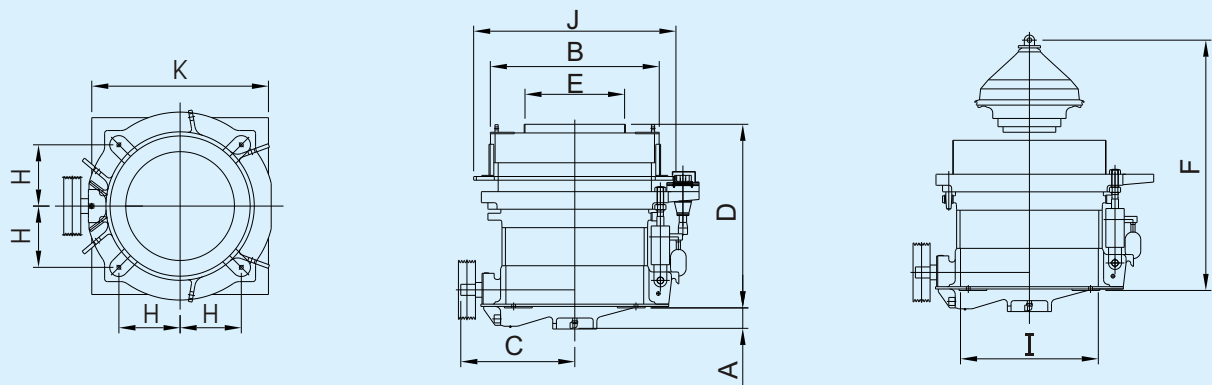

Crusher Cavity Selection

破碎機腔型

破碎機型號 Crusher Size	破碎腔型 Cavity	緊邊給料口 Feed opening (mm) (close side)	開邊給料口 Feed opening (mm) (open side)	最小排料口 Minimum setting (mm)
P1A	超細 SS (Extra Fine)	20	50	6
	細 S (Fine)	50	75	9
	中 F (Medium)	70	97	9
	粗 C (Coarse)	95	120	17
	超粗 CC (Extra Coarse)	145	165	25
P2A	超細 SS (Extra Fine)	25	66	6
	細 S (Fine)	95	128	13
	中 F (Medium)	125	156	16
	粗 C (Coarse)	185	208	19
	超粗 CC (Extra Coarse)	205	230	38
P3A	超細 SS (Extra Fine)	25	72	6
	細 S (Fine)	107	148	14
	中 F (Medium)	150	190	17
	粗 C (Coarse)	211	240	20
	超粗 CC (Extra Coarse)	233	267	25
P4A	超細 SS (Extra Fine)	40	104	6
	細 S (Fine)	111	164	14
	中 F (Medium)	198	245	20
	粗 C (Coarse)	252	292	25
	超粗 CC (Extra Coarse)	299	333	30

Crusher Capacities


破碎機生產能力

生產能力表可作為高速錐碎機初步選型的工具，表中數據適用於鬆散密度1.6t/m³的物料，給料中、篩除小於排料口粒級；開路作業條件下的生產能力，在給料中、細粒度含量較高。閉路作業條件，設備能力比開路作業高10%-25%。破碎機作為生產回路中的一個重要組成部份，其性能的發揮部份取決於給料機、皮帶機、震動篩、支撐結構、電動機、傳動裝置及料庫等的正確選擇和操作使用。

為了選擇適合您的特定使用條件的破碎機，請諮詢啓銘機械的工程師。

Cone crusher capacity charts are developed for use as an application tool to properly utilize the PA series' capabilities. The capacity figures shown apply to material weighing 100 pounds per cubic foot or 1600 kg per cubic meter. The crusher is one component of the circuit. As such, its performance is in part dependent on the proper selection and operation of feeders, conveyors, screens, supporting structure, electric motors, drive component and surge bins.

For individual conditions and further information, please consult CMC engineers.

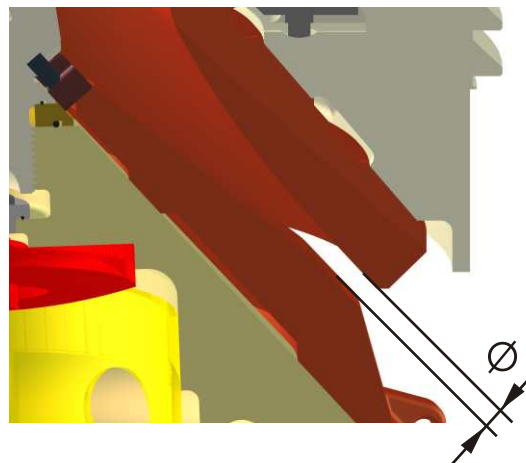


		緊邊排料口 Closed Side Setting											
型號 Size	噸/時 Tone/Hour	6mm	8mm	10mm	13mm	16mm	19mm	22mm	25mm	32mm	38mm	45mm	51mm
P1A	T/H	42-52	47-57	52-66	57-76	66-85	71-90	76-95	80-104	95-133			
P2A	T/H			86-116	116-146	136-176	146-186	156-196	166-216	186-231	206-246		
P3A	T/H			110-136	146-180	176-216	196-236	216-256	226-276	246-316	296-376	346-436	
P4A	T/H			136-171	180-226	221-276	250-316	270-340	290-366	320-426	356-486	406-556	460-626

石材、硬度偏差產能正負8% Materials cause ±8% capacity variation.


Gradation Curves

粒度特性曲線

中碎作業排料粒度分佈曲線
Medium Gradation Curve

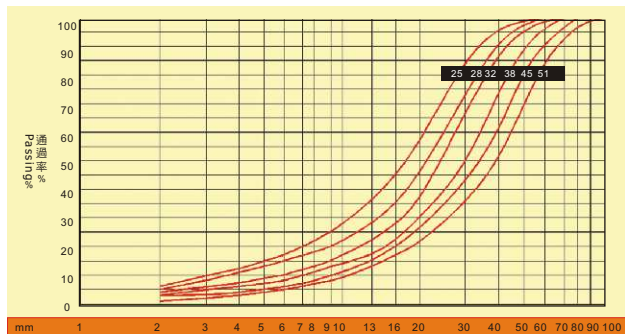

細碎作業排料粒度分佈曲線
Fine Gradation Curve

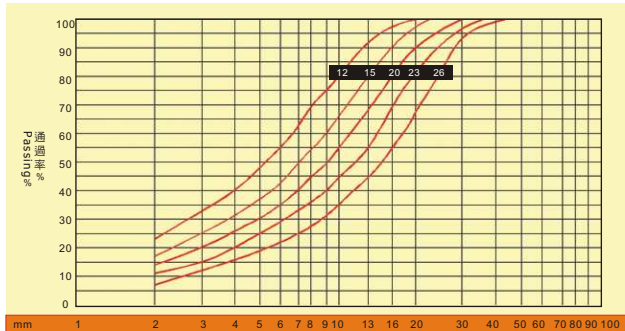

表中粒度和生產能力與給料粒度、破碎腔型、原料密度、原料清潔度、原料水份含量及可碎性等因素有關。

The gradation and capacities shown are dependent on the feed gradation, the crushing chamber, the material density, the material cleanliness, its moisture and its crushability.




Versatile Application

適用性更強

由於PA系列高速錐碎機強度高、速度調整範圍大，不同破碎腔型轉變方便，提供了無與倫比應用靈活性。

Due to PA series high speed cone crusher has features of high strength, large speed adjustment range and easy change of different cavities, it provides uncompetitive versatile application.

- 破碎比大，破碎流程短，有利於節省機械裝置面積和使用的電力。
Large crushing ratio and less crushing process which has advantage of required power and plant space.
- 從中碎腔型轉換成細碎腔型的使用，只需要更換牙板和改變轉速。
It is only required to change liners' type and speed in order to change application from coarse to fine crushing application
- 通過更換牙板板並結合調整轉速，就可適應從中碎到細碎或人工製砂的應用變化。
It is easy to change applications from medium crushing to fine crushing or crushed sand through change of liners and speed

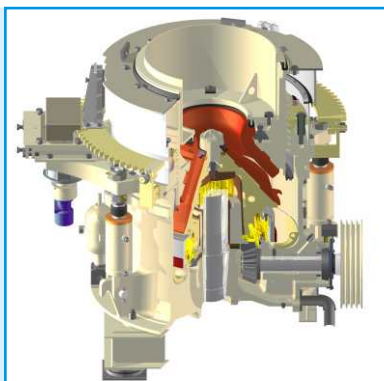

新型過鐵釋放設計 New trap iron release design

Protection device

保護裝置

1. 油溫超過設定值時，機台會停機保護。
Oil temperature exceed set value, crusher motor will stop
2. 潤滑油油壓低於設定值時，機台會自動停機。
Oil flow is under set value, crusher motor will stop

以上的保護裝置PA液壓破碎機的停機時間減少，增加了操作人員信心。
The above protection device of PA series cone crusher shorten the down time and enhance the confidence of operators.

啓銘機械股份有限公司 <http://www.chyimeang.com>
CHYI MEANG MACHINERY CO., LTD. E-mail : sales@chyimeang.com



桃園廠 Main Office & Factory (Taoyuan)

桃園縣八德市介壽路二段 535 號
No. 535 Chieh-Shou Rd. Sec. 2. Pate
City Taoyuan Hsien Taiwan
Tel : 886-3-3666167-9 Fax : 886-3-3668366



雲林廠 Office & Factory (Yunlin)

雲林縣林內鄉重興村 68 之 50 號
No. 68-50, Chongsing Village,
Yunlin County, Taiwan
Tel : 886-5-5890167-8 Fax : 886-5-5890169



屏東廠 Office & Factory (Pingtung)

屏東縣里港鄉三和路 119 之 66 號
No. 119-66, Sanhe Rd., Ligang Township,
Pingtung County, Taiwan
Tel : 886-8-7733735, 7733730 Fax : 886-8-7733732



中國廈門廠 Office & Factory (Xiamen)

福建省龍海市龍池開發區
鴻漸工業園橫二路 4 之 1 號
No. 4-1, Heng Erh Road, Hong Jian
Industrial Park, Long Chi Development
Zone, Long Hai City, Fujian Province
Tel : 86-596-6769-799 Fax : 86-596-6769-199

Agent/Distributor: